


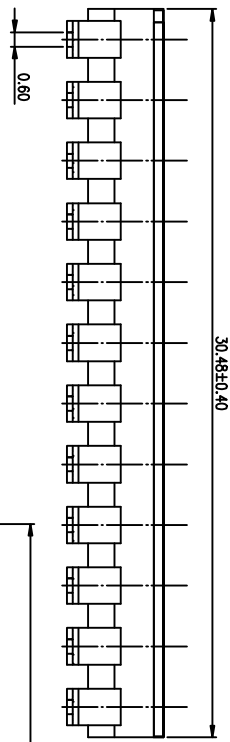

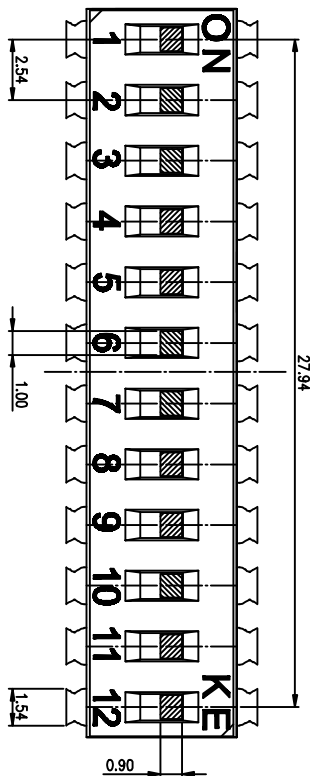


PRODUCT NO.	DSIC12S1GET
RoHS compliant	

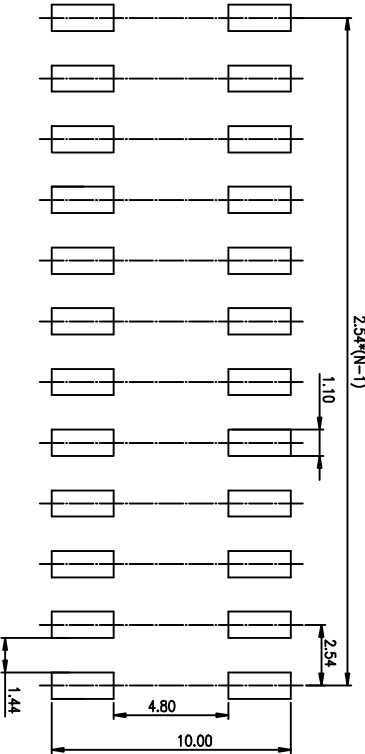



(Construction)



RECOMMENDED P.C.B. LAYOUT (TOP VIEW)

- NOTES :
- 1>.Specification:
- 1>.Operating force:1000gf Max
 - 2>.Operating Temperature: -40° to+85°
 - 3>.Storage Temperature: -40° to+85°
 - 4>.Mechanical Life: 3000cycles minimum
 - 5>.Electrical Life: 2000cycles 25mA 24VDC
2. PLATING:
- GOLD FLASH 1u"(min.) SOLDER TAIL,
3u" GOLD PLATING ON THE CONTACT AREA,
WITH 50u" NICKEL UNDERPLATINGOVERALL.

3. PART NUMBER DESCRIPTION

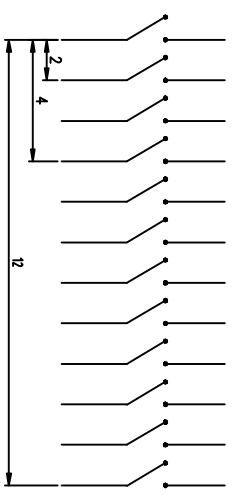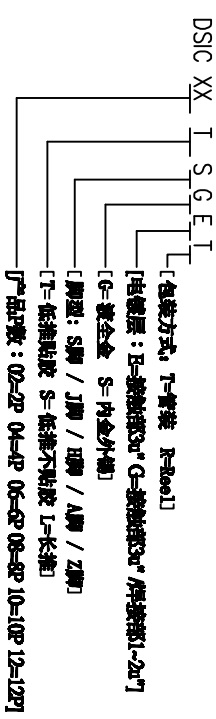

[Schematische]

TOLERANCE UNLESS OTHERWISE SPECIFIED		INSPECTION COPY	
LINER	ANGLES	PROJECTION	
0 ± 0.25	0. ± 2'		
.00 ± 0.15	.0 ± 1'		
.000± 0.10	.00± 0.5'		
DESIGN	kathy	2012/04/12	
DRAWING			
CHECK			
APPRO.			
BY DSIC SERIES PITCH 2.54mm		TITLE	
PRODUCT FAMILY DSIC SERIES		PRAT NO.	
FILE NO. DSIC12S1GET-A		UNIT SCALE SHEET REV.	
SIZE mm		Z : 1 10F 1 A	

Kingke 總督精機電子股份有限公司
Dongguan Kingkek Industrial Co., Ltd.